




Sunking Industry (Shanghai) Co., LTD
尚君实业（上海）有限公司




HARD WINDING MACHINE

SK-80DWH	CONFIGURATIONS
Layout of machines	Double - side machine
Winding tube type	3°30' , 4°20' , 5°57' , 9°15' ,
Anti-overlapping device	Electronic anti overlap parameter setting
Electric waxing	Square hole wax can be put into a single set of wax
Yam guide stroke	144mm
Drive	Variable frequency AC single spindle motor
Grooved drum specifications	82mm 2.5 turns
winding speed	300-1100m/min
Supply voltage	Three Phase 400V ±10% 50/60Hz
Power	60w/spindle
Cone size	Max. 260mm
Tight cylinder density	0.3- 0.45g/cm³
Winding	CS: 0° : CR: 3° 30', 4° 20' , 5°57' 9°15'
Length measurement system	Theoretical length or Holzer sensor length
Spindle per unit	12
Composition Ingot number	156
Head weight size	50kg 376x650x1250mm
Per-unit weight size	380kg 2128x993x2240mm
Other	
Auto stop control	Electronic auto- stop device
Waxing device	Optional
Digital display	Optional

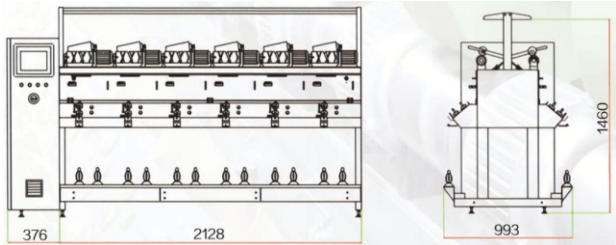

Sunking Industry (Shanghai) Co., LTD
尚君实业（上海）有限公司

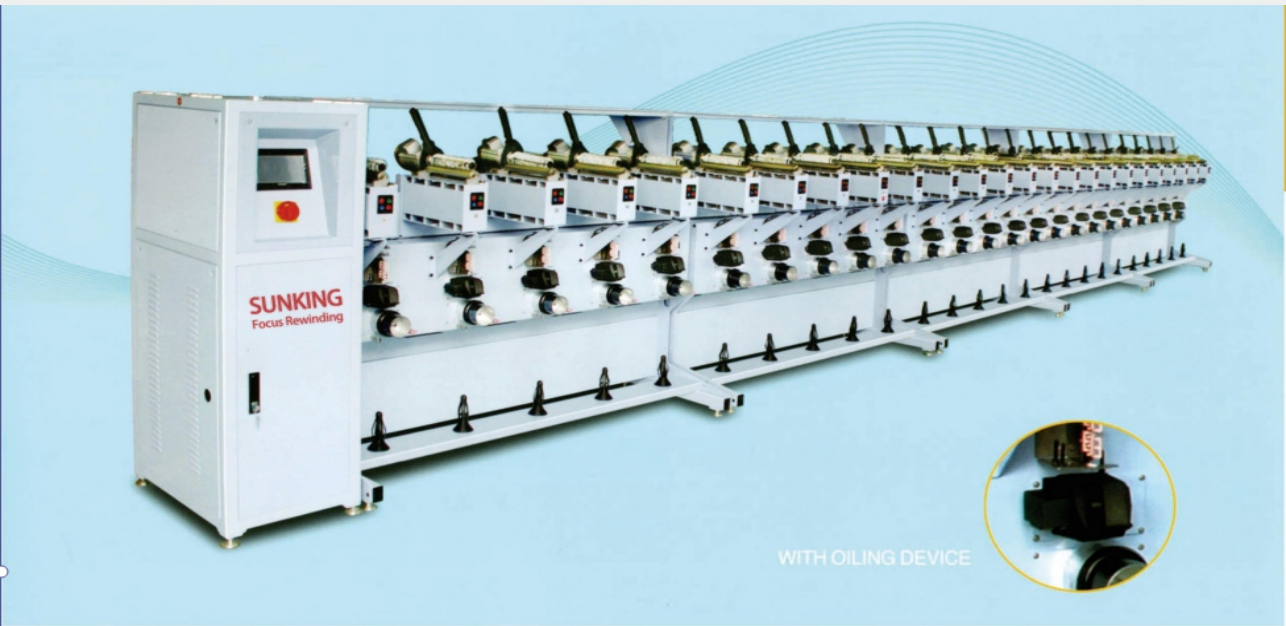


PRECISION SOFT WINDING MACHINE

SK - 80PWS	CONFIGURATIONS
Types of winding	Precision winding/Electronic winding
Mechanical speed	Up to 1200m/m (process speed depending on process parameters)
Package shape	Freely programmable
Traverse length	30-250mm infinitely variable
Package diameter	180mm-200mm
Package weight	Up to 4kg (Weight depends on material type)
Supply package diameter	Up to 320mm
Yarns	Textured or flat filaments,elastic yarns,silk,staple yarns,fine technical yarns
Take-up tubes	0°- 5° 57'
Layout	Single sided machine
N° of spindles per section	5
Min./max.N ° of spindles	5/60
Gauge	360mm
Drive	Individual
Installed power	~280w Per spindle
Power consumption	100w Per spindle
Density of winding	Freely program mable
Size (L x H x W)	1823x700x1550mm



Sunking Industry (Shanghai) Co., LTD
尚君实业（上海）有限公司

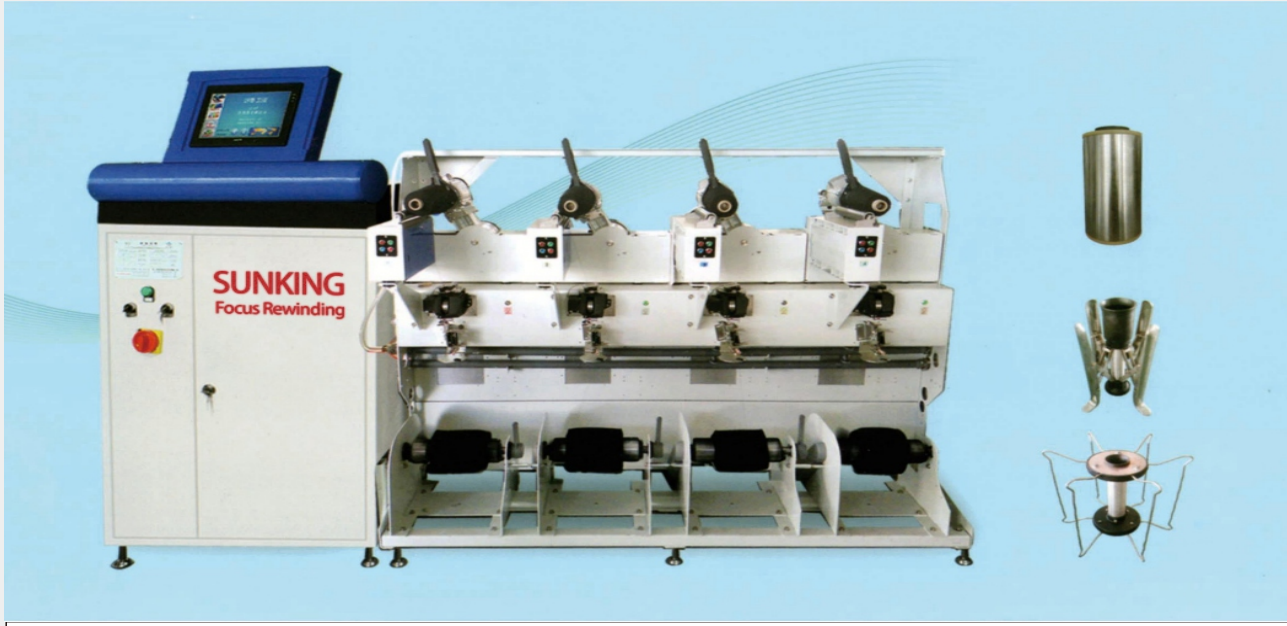

PRECISION HARD WINDING MACHINE

SK-80PWH	CONFIGURATIONS
Types of winding	Precision winding/Electronic winding
Mechanical speed	Up to 1200m/m (process speed depending on process parameters)
Package shape	Freely programmable
Traverse length	30-250mm infinitely variable
Package diameter	180mm-200mm
Package weight	Up to 2kg (Weight depends on material type)
Supplypackage diameter	Upto 320mm
Yarns	Textured or flat filaments,elastic yarns,silk,staple yarns,fine technical yarns
Take-up tubes	0°- 5° 57'
Layout	Single sided machine
N° of spindles per section	4
Min./max.N ° of spindles	4/40
Gauge	450mm
Drive	Individual
Installed power	380w Per spindle
Power consumption	100 w Per spindle
Density of winding	Freely program mable
Size (LxHxW)	1823x700x1550mm



Sunking Industry (Shanghai) Co., LTD
尚君实业（上海）有限公司



Sunking Industry (Shanghai) Co., LTD
尚君实业（上海）有限公司




Sunking Industry (Shanghai) Co., LTD
尚君实业（上海）有限公司



SOFT WINDING MACHINE

SK-80DWS	CONFIGURATIONS
Layout of machines	Double-side machine
Winding tube type	3°30' , 4°20'
Anti-overlapping device	Electronic anti overlap parameter setting
Yarn guide stroke	147mm, 144mm ,151mm
Drive	Variable frequency AC single spindle motor
Grooved drum specifications	82mm 2.5turns
Traverse soft edge	Each section has an independent traverse device
winding speed	300-1100m/min
Supply voltage	Three Phase 400V ±10% 50/60Hz
Power	60w/spindle
Cone size	Max, 260mm
Cone density	0.3- 0.45g/cm³
Winding	CS: 0° ; CR: 3° 30', 4° 20 ' , 5°57 '
Length measurement system	Theoretical length or Holzer sensor length
Spindle per unit	12
Composition Ingot number	156
Head weight size	50kg 376x650x1250mm
Per-unit weight size	380kg 2128x993x2240mm
Other	
Auto- stop control	Electronic auto- stop device
Waxing device	Optional
Digital display	Optional

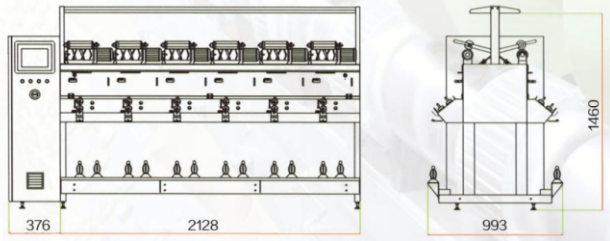

Tel:0086-21-33518045/0086-21-33518046

Fax: 0086-21-33518047

Mobile No:0086-189 1736 0098

WhatsApp Number :0086-189 1736 0098

Mail: shary@vip.163.com

www.shsunking.en.alibaba.com

http://www.sunkingmachinery.com/

Add : Room 838 No.1877 CaoAn Road. Jiading District,Shanghai City.

